




Toothed Lock Washers (JIS B 1255)

Countersunk type

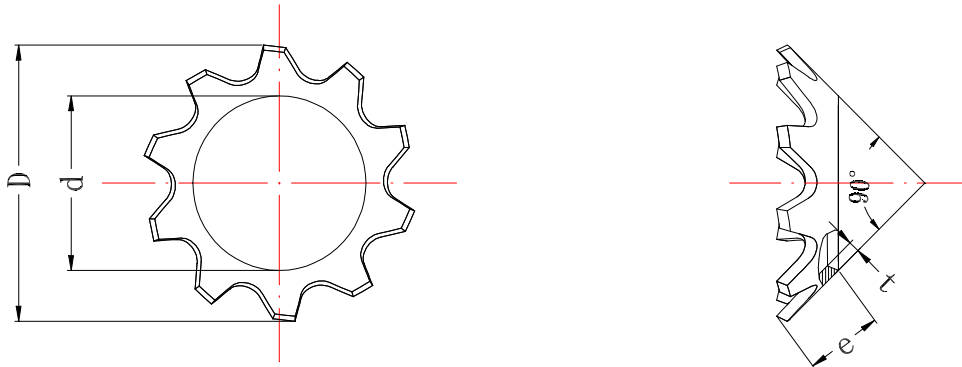


Unit: mm

Size-No.	Screw size	d		D	e	t		Nos. of Teeth	
		Max.	Min.	Approx.	Max.	Max.	Min.		
CW	-3	3	3.4	3.2	6	1.8	0.43	0.37	8
	3.5	3.5	3.9	3.7	7	2.1	0.43	0.37	8
	4	4	4.5	4.3	8	2.5	0.43	0.37	8
	4.5	4.5	5.0	4.8	9	2.7	0.535	0.465	9
	5	5	5.5	5.3	10	3.1	0.535	0.465	9
	6	6	6.7	6.4	12	3.8	0.535	0.465	10
	8	8	8.7	8.4	16	5.1	0.64	0.56	12

Material= Carbon spring steel. Hardness = HRC40-50.

Finish = Zn plating, Chromate dip.

External Internal type

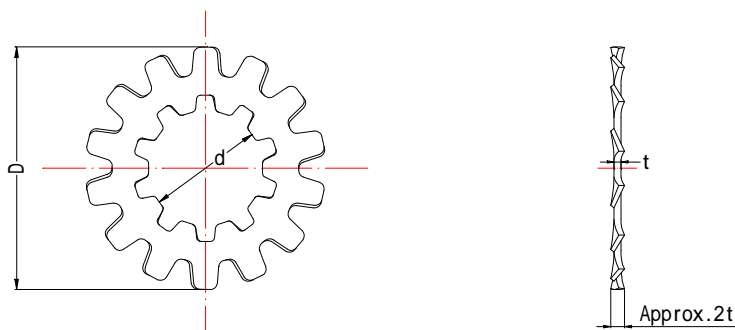

Unit: mm

Size-No.	Screw size		d		D		t		Nos. of Teeth		
	Mm	Inch	Max.	Min.	Max.	Min.	Max.	Min.	Internal	External	
ABW	-4	4	-	4.5	4.3	15	14.5	0.64	0.56	8	12
	4.5	4.5	-	5.0	4.8	15	14.5	0.64	0.56	8	12
	5	5	-	5.5	5.3	15	14.5	0.64	0.56	8	12
	5.5	5.5	-	6.0	5.8	17.5	17	0.85	0.75	9	12
	6	6	-	6.7	6.4	17.5	17	0.85	0.75	9	12
	8	8	-	8.7	8.4	22.5	21.9	0.95	0.85	9	12
	³ / ₈	-	³ / ₈	10.1	9.8	26	25.4	1.055	0.945	9	14
	10	10	-	10.9	10.5	26	25.4	1.055	0.945	9	14
	⁷ / ₁₆	-	⁷ / ₁₆	11.8	11.4	29	28.4	1.055	0.945	10	14
	12	12	-	12.9	12.5	29	28.4	1.055	0.945	10	14
	¹ / ₂	-	¹ / ₂	13.4	13	32	31.2	1.265	1.135	10	14
	14	14	-	14.9	14.5	32	31.2	1.265	1.135	10	14
	16	16	⁵ / ₈	16.9	16.5	35	34.2	1.47	1.33	12	16

Material=Carbon spring steel. Hardness=HRC40~50. Finish=Zn plating, Chromate dip.

ALL RIGHTS RESERVED

DONGGUAN EAGLE SANKYOU SCREWS AND FASTENERS CO.,LTD.