




Cross-Recessed Head Machine Screws

十字穴機械螺絲

JIS B 1111-1996
(JIS B 1111-1974)

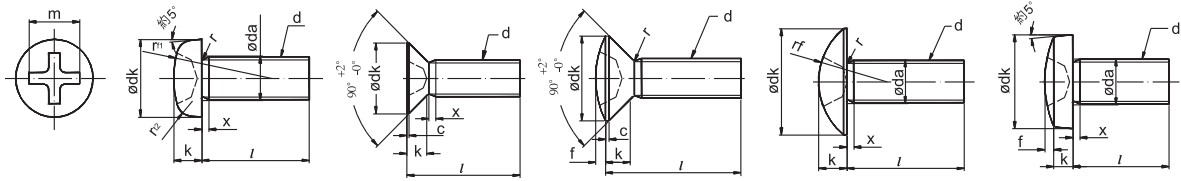

基本尺寸

單位:mm

(d)	牙距 P	十 番 字 穴 號	PAN HEAD				FLAT, OVAL COUNTERSUNK				TRUSS				BINDING			
			dK		k		dK		K		f 約	dK		k,k+f		dK		
			基準 寸法	公差	基準 寸法	公差	基準 寸法	公差	基準 寸法	公差		基準 寸法	公差	基準 寸法	公差	基準 寸法	公差	
M 2	0.4	1	3.5	0 -0.4	1.3	±0.1	4	0 -0.4	1.2	0 -0.2	0.4	4.5	0 -0.4	1.2	±0.1	4.3	0 -0.4	
●M(2.2)	0.45		4		1.5		4.4		1.3		0.5			5		1.3		4.7
*M 2.3	0.4		4		1.5		4.6		1.35		0.5			5.2		1.4		4.9
M 2.5	0.45		4.5		1.7		5		1.45		0.55			5.7		1.5		5.3
*M 2.6	0.45		4.5		1.7		5.2		1.5		0.6			5.9		1.6		5.5
M 3	0.5	2	5.5	0 -0.5	2	±0.15	6	0 -0.5	1.75	0 -0.3	0.7	6.9	0 -0.5	1.9	±0.15	6.3	0 -0.5	
●M(3.5)	0.6		6		2.3		7		2		0.8			8.1		2.2		7.3
M 4	0.7		7		2.6		8		2.3		0.9			9.4		2.5		8.3
●M(4.5)	0.75		8		2.9		9		2.55		1			10.6		2.8		9.3
M 5	0.8		9		3.3		10		2.8		1.2			11.8		3.1		10.3
M 6	1.0	3	10.5	0 -0.7	3.9	±0.2	12	0 -0.7	3.4	0 -0.4	1.4	14	0 -0.7	3.7	±0.2	12.4	0 -0.7	
M 8	1.25		14		5.2		16		4.4		1.8			17.8		4.8		16.4

材 料	鋼	炭素鋼 合金鋼
	黃銅	JIS H 3260 C2700W
	不鏽鋼	JIS G4315

參 考

長度L公差 : mm

牙徑 規格	M2	(M2.2)	M2.3	M2.5	M2.6	M3	(M3.5)	M4	(M4.5)	M5	M6	M8	牙徑 規格 區分 長度 區分	M2.6 以下	M2.6以 上M4.5 以下	M4.5 以上
	8	10	10	12	12	12	14	16	20	20	25	30		4以下	0 -0.3	-
3	▲ 13	▲	19	▲	24	▲	▲	▲	▲	▲	▲	▲	4以上 10以下	0 -0.4	0 -0.6	0 -0.8
4	▲ 14	▲	21	▲	27	44	57	87	▲	▲	▲	▲	10以上 20以下	0 -0.6	0 -0.6	0 -1
5	16	▲	24	▲	30	49	59	95	▲	▲	▲	▲	20以上 40以下	0	0	0
6	18	▲	26	▲	33	53	69	102	▲	▲	▲	▲	40以上	-	0	0
8	21	▲	31	▲	40	61	81	118	▲	▲	▲	▲				
10	25	▲	36	▲	46	69	94	133	▲	▲	▲	▲				
12	29	▲	41	▲	52	77	106	149	▲	▲	▲	▲				
14	32	▲	46	▲	59	85	118	164	▲	▲	▲	▲				
16	36	▲	51	▲	65	94	130	180	▲	▲	▲	▲				
20	43	▲	61	▲	78	110	155	211	▲	▲	▲	▲				
25		▲	73	▲	84	131	196	250	▲	▲	▲	▲				
30		▲	85	▲	100	151	216	288	▲	▲	▲	▲				
35		▲		▲		172	247	327	▲	▲	▲	▲				
40		▲		▲		192	278	364	▲	▲	▲	▲				
45		▲		▲		231		410	▲	▲	▲	▲				
50		▲		▲		252		448	▲	▲	▲	▲				