




Hexagon Socket Head Cap Screws

內六角穴杯頭螺絲

JIS B 1176-2006

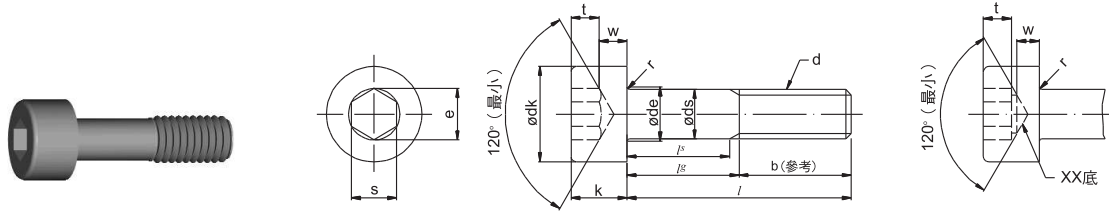

單位:mm

公稱規格 (d)	牙距 (P)	b 參考	dk			ds		e 最小	k		s			t 最小	w 最小
			最大 (基本尺寸)	最大 (9)	最小 (10)	最大 (基本尺寸)	最小		最大 (基本尺寸)	最小	(基本尺寸)	最小	最大 1欄		
M1.6	0.35	15	3.00	3.14	2.86	1.6	1.46	1.733	1.6	1.46	1.5	1.52	1.580	0.7	0.55
M2	0.4	16	3.80	3.98	3.62	2	1.86	1.733	2	1.86	1.5	1.52	1.580	1	0.55
M2.5	0.45	17	4.50	4.68	4.32	2.5	2.36	2.303	2.5	2.36	2	2.02	2.080	1.1	0.85
M3	0.5	18	5.5	5.68	5.32	3	2.86	2.873	3	2.86	2.5	2.52	2.580	1.3	1.15
M4	0.7	20	7.0	7.22	6.78	4	3.82	3.443	4	3.82	3	3.02	3.080	2	1.4
M5	0.8	22	8.5	8.72	8.28	5	4.82	4.583	5	4.82	4	4.02	4.095	2.5	1.9
M6	1	24	10.0	10.22	9.78	6	5.82	5.723	6	5.70	5	5.02	5.140	3	2.3
M8	1.25	28	13.0	13.27	12.73	8	7.78	6.863	8	7.64	6	6.02	6.140	4	3.3
M10	1.5	32	16.0	16.27	15.73	10	9.78	9.149	10	9.64	8	8.025	8.175	5	4
M12	1.75	36	18.0	18.27	17.73	12	11.73	11.429	12	11.57	10	10.025	10.175	6	4.8
(M14)	2	40	21.0	21.33	20.67	14	13.73	13.716	14	13.57	12	12.032	12.212	7	5.8
M16	2	44	24	24.33	23.67	16	15.73	15.996	16	15.57	14	14.032	14.212	8	6.8
M20	2.5	52	30	30.33	29.67	20	19.67	19.437	20	19.48	17	17.050	17.230	10	8.6
M24	3	60	36	36.39	35.61	24	23.67	21.734	24	23.48	19	19.065	19.275	12	10.4
M30	3.5	72	45	45.39	44.61	30	29.67	25.154	30	29.48	22	22.065	22.275	15.5	13.1
M36	4	84	54	54.46	53.54	36	35.61	30.854	36	35.38	27	27.065	27.275	19	15.3
M42	4.5	96	63	63.46	62.54	42	41.61	36.571	42	41.38	32	32.080	32.330	24	16.3
M48	5	108	72	72.46	71.54	48	47.61	41.131	48	47.38	36	36.080	36.330	28	17.5
● M56	5.5	124	84	84.54	83.46	56	55.54	46.831	56	55.26	41	41.080	46.330	34	19
● M64	6	140	96	96.54	95.46	64	63.54	52.531	64	63.26	46	41.330	46.080	38	22

註：dk (9) 為頭部壓直紋、(10) 為頭部不壓直紋。

碳鋼螺栓 拉力強度標示	8.8	10.9	12.9
不鏽鋼螺栓 拉力強度標示	A2-70		A2-50